

X-Y-Z Axis Travel – Table Size	500 x 800 x 500 mm – BT -40
X-Y-Z Axis Travel - Table Size	500 x 1000 x 800 mm – BT-50
X-Y-Z Axis Travel - Table Size	1100 x 600 x 600 mm – BT-50
X-Y-Z Axis Travel - Table Size	1000 x 2000 x 1000MM – BT - 50



PARAS PRESS TECH AUTOMATION

CHUCK SIZE	150 X 400 LENGTH
CHUCK SIZE	200 X 500 LENGTH
CHUCK SIZE	250 X 1000 LENGTH



PARAS PRESS TECH AUTOMATION

The TruLaser 3030 and TruLaser 3040 laser cutting machines with CO2 lasers combine high performance with cut quality that is second to none. The TruFlow laser, which is robust and reliable, will provide you with extremely smooth cutting edges which generally do not require post-processing.


Laser power: Max. 5000 W
Working range: 1500 X 3000 Mm
Max. work piece weight: 900 Kg
Max. simultaneous speed: 140m/Min.
Materials: Mild Steel
Thickness Up To 25 Mm
Stainless Steel Thickness Up To 20 Mm
Aluminium Thickness Up To 12,7 Mm



PARAS PRESS TECH AUTOMATION



PARAS PRESS TECH AUTOMATION

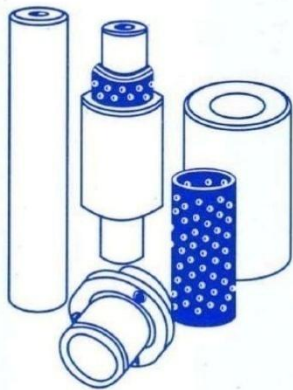

NOTES :-

1. Standard Daylight 100 mm. unless otherwise specified excess daylight over 120 mm will be charged 5% extra per 25 mm additional length.
2. Price Quoted at Nett ex-our works.
3. All Taxes as applicable Packing, Forwarding Transport will be also be extra.
4. Payment 50% advance along with the order and balance against delivery.
5. A special discount will be offered on Quantity requirements.
6. Also available your special size.

Manufactured by :


PARAS PRESS
 TECH AUTOMATION

Nr. Unnati Estate, Suttar Karkhana,
 National Highway No. 8, Naroda,
 Ahmedabad-382 330.


Phone : (O) 22821379 Mobile : 98250 21972

Fax : (079) 22830162

E-mail : jitupatel69@rediffmail.com


PARAS PRESS
 TECH AUTOMATION

DIE SETS ALL STEEL

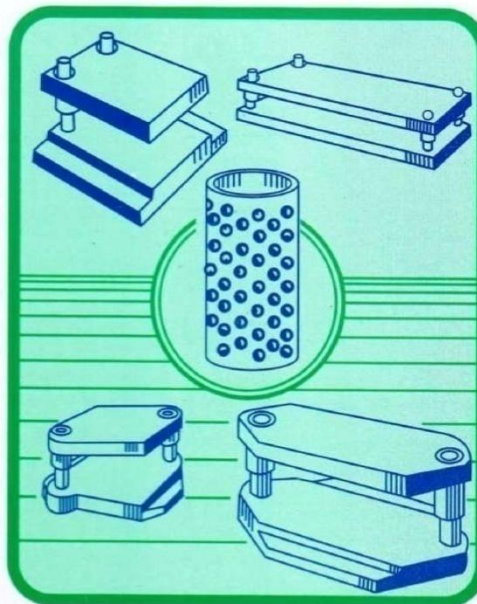

- Quality
- Reliability
- Service

WWW.PARASPRESSTECHAUTOMATION.COM

PARAS PRESS TECH AUTOMATION

SUTTER KARKHANA,NR.UNNATI ESTATE, N.H.NO.-8,
 NARODA, AHMEDABAD – 382330.

TEL. NO – 079-22821379 / MOBILE NO. - 9825021972

ALL STEEL PILLAR DIE SETS



- Comprehensive Range Precision fittings and optimum performance are the watch words of our commercial Pillar Die Sets in our New Stock Die Set Systems.

- For ease of selection these diesets are mainly divided into four series.
- Series : K One side Pillar Die Sets
" E Centre Pillar Die Sets
" T Cross Pillar Die Sets
" A Four Pillar Die Sets
- These four series covers the maximum ranges and types of the most useful different sizes in all steel materials. If your sizes does not Fit into these ranges. Your special requirements will be taken Care immediately. The purpose of this brochure is to list minimum recommended dimensions in millimeters and nearest inches.
- Normal Day light is 100 mm Extra day light Supply on your order.
- Guide pillar and bushes are made of high grade alloy steel hardned to 58°-60° R-C. and tempered and then precision ground close tolerances to give longer Life to your Dies.
- We also supply Ball-bearing cages in Aluminium of Brass body.
- We also Make Mould Guide Pins and Guide Bushes for Plastic injection Moulds as per your drawing.
- If you have got any problem in die set please contact us.

ALL STEEL

Ref. K

One Side Pillar
Die Sets



Sr. No.	Order Ref. No.	Max. Diesp.						Pillar Diam
		X	Y	L	W	T	B	
1.	K-10	85	85	125	125	20	20	18/20
2.	K-11	85	110	125	150	20	20	
3.	K-12	110	110	150	150	20	25	
4.	K-13	110	130	150	175	25	25	24/25
5.	K-14	135	130	175	175	25	25	
6.	K-15	135	145	175	200	25	30	
7.	K-16	160	145	200	200	30	33	28/30
8.	K-17	160	170	200	225	30	33	
9.	K-18	185	170	225	225	30	35	
10.	K-19	210	196	250	250	30	35	32/34
11.	K-20	210	230	250	285	30	35	
12.	K-21	245	230	285	285	30	35	
13.	K-22	260	245	300	300	30	35	
14.	K-23	260	265	325	325	35	35	36/38
15.	K-24	285	265	325	325	35	35	
16.	K-25	285	285	325	350	35	40	40/42
17.	K-26	310	285	350	350	35	40	
18.	K-27	335	310	375	375	40	45	
19.	K-28	360	335	400	400	40	45	
20.	K-29	385	360	425	425	40	45	



PARAS PRESS TECH AUTOMATION


SUTTER KARKHANA,NR.UNNATI ESTATE, N.H.NO.-8,
NARODA, AHMEDABAD – 382330.
TEL. NO – 079-22821379 / MOBILE NO. - 9825021972

KETAN DIE SET

ALL STEEL

Ref. E

Centre Pillar
Die Sets

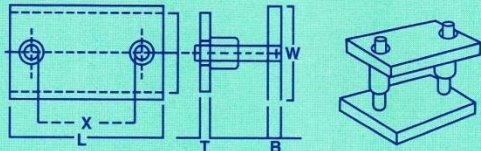

Sr. No.	Order Ref. No.	Max. Diesp.						Pillar Diam
		X	Y	L	W	T	B	
1.	E-30	70	80	150	100	20	20	18/20
2.	E-31	95	100	175	125	20	20	
3.	E-32	120	100	200	125	25	25	
4.	E-33	130	130	225	150	25	30	25/24
5.	E-34	185	130	285	150	30	30	
6.	E-35	185	155	285	175	30	30	
7.	E-36	205	130	305	150	30	35	28/30
8.	E-37	125	160	225	180	30	35	
9.	E-38	185	180	285	200	30	35	
10.	E-39	200	155	305	175	30	35	32/34
11.	E-40	290	205	400	225	30	35	
12.	E-41	290	230	400	250	35	35	
13.	E-42	290	260	400	280	35	35	
14.	E-43	280	155	400	175	35	40	36/38
15.	E-44	360	200	480	220	35	40	
16.	E-45	280	180	400	200	35	40	40/42
17.	E-46	360	230	480	250	35	40	
18.	E-47	360	300	480	320	35	40	
19.	E-48	420	250	540	270	35	40	
20.	E-49	420	300	540	320	35	40	


www.ketanindustries.com

KETAN DIE SET

ALL STEEL


Ref. T

Cross Pillar
Die Sets

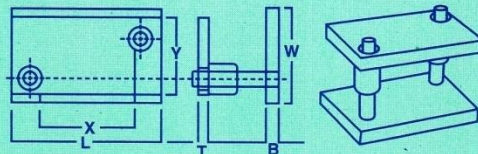

Sr. No.	Order Ref. No.	Max. Diesp.						Pillar Diam
		X	Y	L	W	T	B	
1.	T-50	70	80	150	100	20	20	18/20
2.	T-51	110	80	180	100	20	25	
3.	T-52	120	105	200	125	25	25	
4.	T-53	80	130	175	150	25	25	24/25
5.	T-54	80	155	175	175	25	25	
6.	T-55	155	155	250	175	25	25	
7.	T-56	102	180	200	200	30	30	28/30
8.	T-57	125	205	225	225	30	30	
9.	T-58	185	205	285	225	30	30	
10.	T-59	144	230	250	250	30	35	32/34
11.	T-60	194	230	300	250	30	35	
12.	T-61	180	265	285	285	30	35	
13.	T-62	195	280	300	300	30	35	
14.	T-63	240	200	360	220	35	35	36/28
15.	T-64	240	250	360	270	35	35	
16.	T-65	310	300	430	320	35	40	40/42
17.	T-66	360	200	480	220	35	40	
18.	T-67	360	300	480	320	35	40	
19.	T-68	420	250	540	270	35	40	
20.	T-69	420	300	540	320	35	40	

www.ketanindustries.com

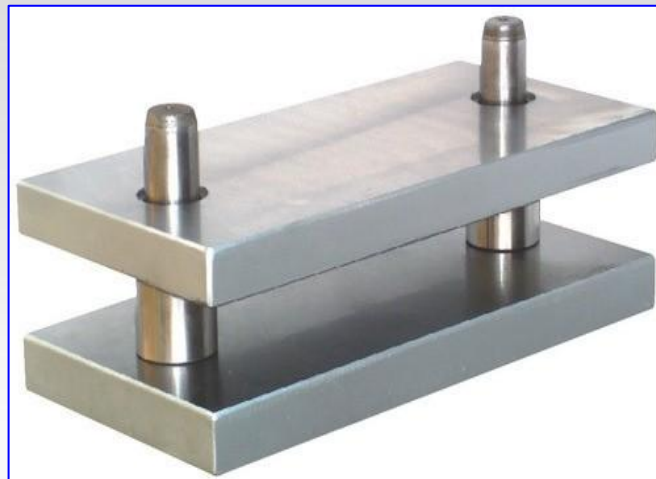

PARAS PRESS TECH AUTOMATION

SUTTER KARKHANA, NR. UNNATI ESTATE, N.H.NO.-8,
NARODA, AHMEDABAD – 382330.


TEL. NO – 079-22821379 / MOBILE NO. - 9825021972

KETAN DIE SET

ALL STEEL

Ref. A

Four Pillar
Die Sets

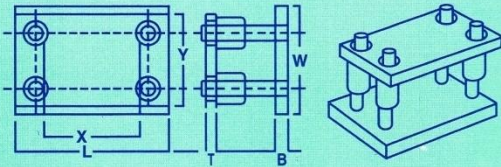

Sr. No.	Order Ref. No.	Max. Diesp.						Pillar Diam
		X	Y	L	W	T	B	
1.	A-70	145	155	225	175	20	25	18/20
2.	A-71	170	130	250	150	20	25	
3.	A-72	200	205	280	225	20	25	
4.	A-73	225	180	320	200	25	30	24/25
5.	A-74	225	205	320	225	25	30	
6.	A-75	240	200	340	220	25	30	
7.	A-76	180	180	285	200	30	30	28/30
8.	A-77	150	230	250	250	30	35	
9.	A-78	200	280	300	300	30	35	
10.	A-79	194	180	300	200	30	35	32/34
11.	A-80	194	230	300	250	30	35	
12.	A-81	240	280	350	300	35	35	
13.	A-82	240	330	350	350	35	35	
14.	A-83	295	200	410	220	35	40	36/38
15.	A-84	295	260	410	280	35	40	
16.	A-85	400	200	530	220	35	40	40/42
17.	A-86	400	310	530	330	35	40	
18.	A-87	430	410	580	430	35	40	
19.	A-88	500	310	630	330	35	40	
20.	A-89	500	410	630	430	35	40	


www.ketanindustries.com

KETAN DIE SET

ALL STEEL

Ref. N

Ball Cage Sleeve



80 x 92 x 230 All Ball Cage (EXPORT)

Sr. No.	Pillar Diam	Bush Diam	Ball Diam	Length M.M.	Price Rs. (each)	
					Alum. Body	Brass Body
1.	18	24	3	65		
2.	20	26	3	65		
3.	20	26	3	80		
4.	24	30	3	65		
5.	24	32	4	80		
6.	25	31	3	65		
7.	25	33	4	65		
8.	25	33	4	80		
9.	28	36	4	80		
10.	28	36	4	100		
11.	30	38	4	80		
12.	30	38	4	100		
13.	32	40	4	80		
14.	32	40	4	100		
15.	34	42	4	80		
16.	34	42	4	100		
17.	36	44	4	80		
18.	36	44	4	100		
19.	40	48	4	80		
20.	40	48	4	100		


www.ketanindustries.com



PARAS PRESS TECH AUTOMATION

SUTTER KARKHANA, NR. UNNATI ESTATE, N.H.NO.-8,
NARODA, AHMEDABAD – 382330.

TEL. NO – 079-22821379 / MOBILE NO. - 9825021972

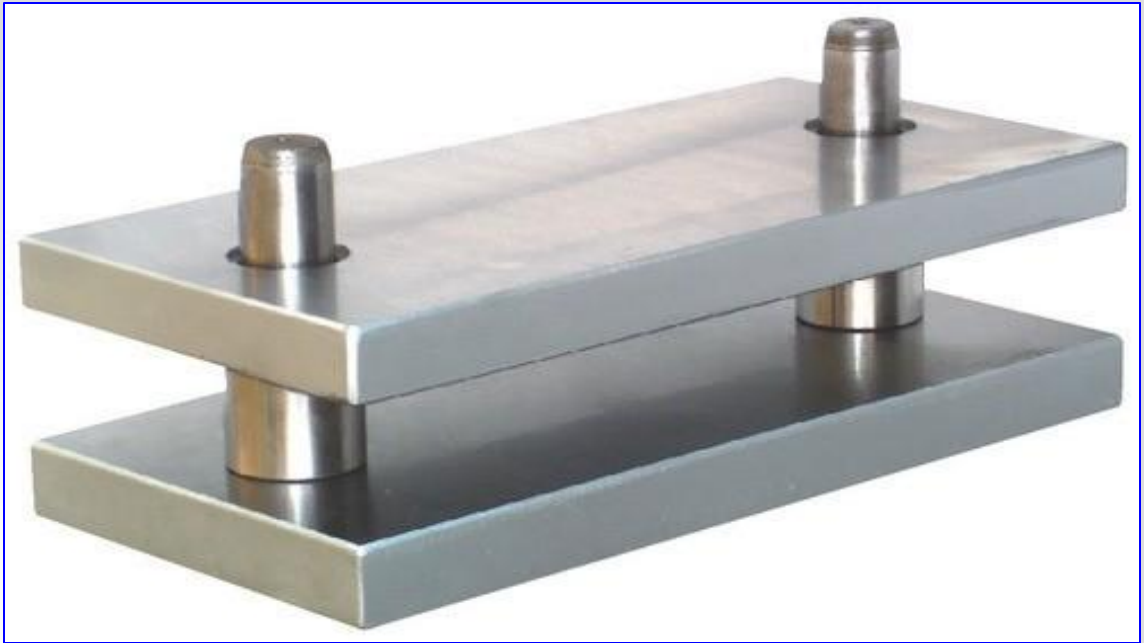

PARAS PRESS TECH AUTOMATION



ALLU.BALL CAGE SLEEVE SIZE LIST			
ID	OD	LENGTH	LENGTH
20	26	80	100
25	31	80	100
28	36	80	100
32	40	80	100
36	44	80	100
40	48	80	100

BRASS BALL CAGE SLEEVE SIZE LIST			
ID	OD	LENGTH	LENGTH
20	26	80	100
25	31	80	100
28	36	80	100
32	40	80	100
36	44	80	100
40	48	80	100

TYPE	TYPE	TYPE
E x LO	E x LO	E x LO




PARAS PRESS TECH AUTOMATION

TYPE	TYPE	TYPE
E x LO	E x LO	E x LO
10 x 025	20 x 305	40 x 254
10 x 032	25 x 025	40 x 305
10 x 038	25 x 032	50 x 064
10 x 044	25 x 038	50 x 076
10 x 051	25 x 044	50 x 089
10 x 064	25 x 051	50 x 102
10 x 076	25 x 064	50 x 115
10 x 305	25 x 076	50 x 127
13 x 025	25 x 089	50 x 139
13 x 032	25 x 102	50 x 152
13 x 038	25 x 115	50 x 178
13 x 044	25 x 127	50 x 203
13 x 051	25 x 139	50 x 229
13 x 064	25 x 152	50 x 254
13 x 076	25 x 178	50 x 305
13 x 089	25 x 203	63 x 076
13 x 102	25 x 305	63 x 089
13 x 305	32 x 038	63 x 102
16 x 025	32 x 044	63 x 115
16 x 032	32 x 051	63 x 127
16 x 038	32 x 064	63 x 152
16 x 044	32 x 076	63 x 178
16 x 051	32 x 089	63 x 203
16 x 064	32 x 102	63 x 229
16 x 076	32 x 115	63 x 254
16 x 089	32 x 127	63 x 305
16 x 102	32 x 139	
16 x 115	32 x 152	
16 x 305	32 x 178	
20 x 025	32 x 203	
20 x 032	32 x 254	
20 x 038	32 x 305	
20 x 044	40 x 051	
20 x 051	40 x 064	
20 x 064	40 x 076	


PILLAR BUSH SIZE LIST								
DIA	LENGTH							
20	160	180	200	225	250	300	350	400
25	160	180	200	225	250	300	350	400
28	160	180	200	225	250	300	350	400
32	160	180	200	225	250	300	350	400
36	*	180	200	225	250	300	350	400
40	*	180	200	225	250	300	350	400



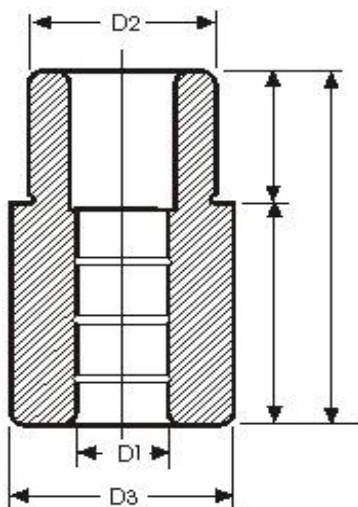

BUSH SIZE LIST - BUSH TYPE


ID	OD	LENGTH	LENGTH
20	36	52	60
25	42	65	75
28	50	80	100
32	52	80	100
36	58	80	100
40	62	80	100/110/125

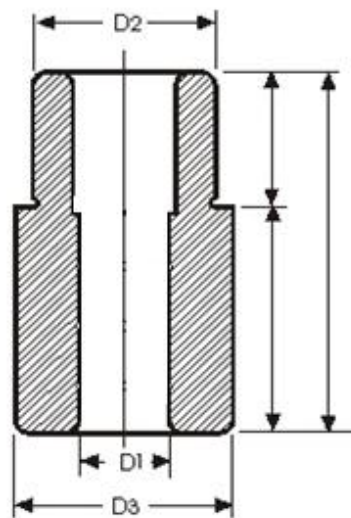

BUSH SIZE LIST - BE.TYPE

ID	OD	LENGTH	LENGTH
26	36	52	60
31	42	65	75
36	50	80	100
40	52	80	100
44	58	80	100
48	62	80	100/110/125



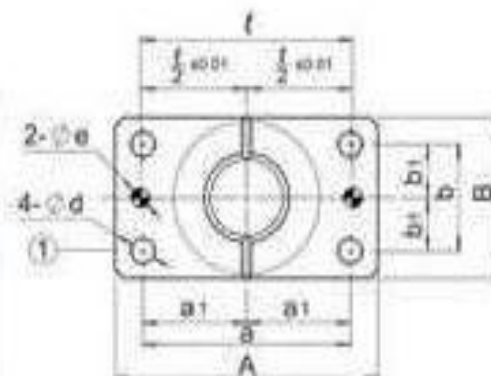

Hardness :-
Pillar - 63 to 55 HRC

O - Oil Type
OL - Oilless Type

Plain Guide Post With Dowel Hole

MODEL	DIA D	A	B	a	a1	b	b1	H	H1	T	eh7	Dia d
		±1	±1	±0.015		±0.015		± 1	±1	±0.5	±0.2	0.015
PGPDH	20	74	44	56	28	30	15	30	40	15	6	6.6
PGPDH	25	84	48	66	33	30	15	30	45	20	8	9
PGPDH	32	100	58	76	38	36	18	40	50	20	8	11
PGPDH	38	130	75	100	50	44	22	50	60	25	10	11
PGPDH	50	155	90	125	62.5	60	30	65	85	25	10	14
PGPDH	60	190	120	150	75	80	40	75	100	30	13	18
PGPDH	80	230	150	180	90	110	55	100	130	35	16	22

Note :- The Guide Post will be available in Oil Type and Oilless Type Also

Note :- Length of Guide Post is 100-300 mm in increment of 25mm (100,125,150,175,200,220,250,300)

STANDARD PILLAR SET

SIZE	PLATE THICKNESS TOP /BOTTAM	PILLAR BUSH DIA. X LENGTH	
5 X 5	20/20	20 X 160 26 X 36 X52	ONE SIDE BE.TYPE
5 X 6	20/20	20 X 160 26 X 36 X52	ONE SIDE BE.TYPE
6 X 6	20/25	20 X 160 26 X 36 X52	ONE SIDE BE.TYPE
6 X 7	25/25	25 X 160 31 X 42 X 65	ONE SIDE BE.TYPE
7 X 7	25/25	25 X 160 31 X 42 X 65	ONE SIDE BE.TYPE
7 X 8	25/25	25 X 160 31 X 42 X 65	ONE SIDE BE.TYPE
8 X 8	32/32	28 X 180 36 X 50 X 80	ONE SIDE BE.TYPE
8 X 9	32/32	28 X 180 36 X 50 X 80	ONE SIDE BE.TYPE
9 X 9	32/32	28 X 180 36 X 50 X 80	ONE SIDE BE.TYPE
10 X 10	32/35	32 X 180 40 X 50 X 80	ONE SIDE BE.TYPE
10 X 11	32/35	32 X 180 40 X 50 X 80	ONE SIDE BE.TYPE
11 X 11	32/35	32 X 180 40 X 50 X 80	ONE SIDE BE.TYPE
12 X 12	32/35	32 X 180 40 X 50 X 80	ONE SIDE BE.TYPE
9 X 10	32/35	32 X 180 40 X 50 X 80	ONE SIDE BE.TYPE
11 X 12	32/35	32 X 180 40 X 50 X 80	ONE SIDE BE.TYPE

**PARAS PRESS TECH AUTOMATION**

SUTTER KARKHANA,NR.UNNATI ESTATE, N.H.NO.-8,
NARODA, AHMEDABAD – 382330.
TEL. NO – 079-22821379 / MOBILE NO. - 9825021972



Air Feeder



Mechanical Roll Feeder



Servo Feeder



Gripper Feeder



Gear Changer Feeder




Straightener Machine



De-Coiler




De-Coiler cum Straighter 2 in 1



Industrial Robot




1. PNEUMATIC AIR FEEDER :



Here are some very basic reasons with which it can be proved that buying a Pneumatic Feeder is the right thinking to do. Installing a feeder on your press does not just mean choosing a pneumatic clamp for feeding the material. You need to choose carefully the right feeder to develop better productivity.

Max Width mm	Max Strip Length mm	Max Strip Thickness mm	Max Strokes per Minutes
50	50	0.8	120
100	100	0.8	100
150	150	0.8	90
200	200	0.8	80
250	250	0.8	65
300	300	0.8	52
100	100	2.5	70
150	150	2.5	60
200	200	2.5	55
250	250	2.5	45
300	300	2.5	35

2. MECHANICAL ROLL FEEDER :




The unit is assembled and all components are secured with high-strength screws. No welding parts, convenient for future repair and replacement of accessories, saving time and cost.

The left and right panels are made directly of liquid metal casting and are adaptable and can be used for a variety of alloy molding, flexibility is good.

The overall structure is compact, the occupied area is small, the installation is simple and convenient.

Max Width mm	Max Strip Length mm	Max Strip Thickness mm
100	50	0 - 1.2
130	80	0 - 1.2
130	100	0 - 1.2
200	150	0 - 1.2
250	250	0 - 1.2
300	100	0 - 1.2

3. SERVO FEEDER & ZIG-ZAG SERVO FEEDER :

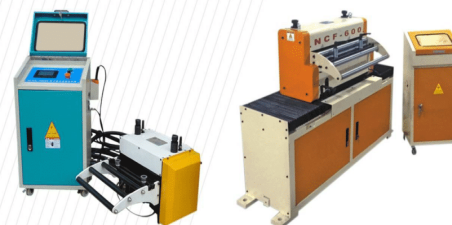

The Ultimate In Feeding Technology When You Want Flexibility , accuracy, Short Set up Time And High Production Performance. The Pitch Length Is Set Up In Few Seconds

MODEL	Max Width mm	Max Strip Length mm	Max Strip Thickness mm	Mold Line Height mm
GSF - 100	100	9999.99	0.2 - 3.2	120 - 280
GSF - 200	200	9999.99	0.2 - 3.2	120 - 280
GSF - 300	300	9999.99	0.2 - 3.2	120 - 280
GSF - 400	400	9999.99	0.2 - 3.2	120 - 280
GSF - 500	500	9999.99	0.2 - 3.2	120 - 280
GSF - 600	600	9999.99	0.2 - 3.2	120 - 280
GSF - 1000	1000	9999.99	0.2 - 3.2	120 - 280
GSF - 1200	1200	9999.99	0.2 - 3.2	120 - 280

4. HIGH SPEED GRIPPER FEEDER :




MODEL	GS - 906	GS - 1006	GS - 1512	GS - 2012
Material Width	0 - 90	0 - 100	0 - 150	0 - 200
Material Thickness	0.1 - 0.2	0.1 - 1.2	0.1 - 1.2	0.1 - 1.2
Material Line Height	60 - 120	60 - 120	60 - 120	60 - 120
Feeding Length	60	60	120	120
Feeding Precision	± 0.06	± 0.06	± 0.06	± 0.06

5. CAM DRIVE FEEDER (GEAR CHANGER FEEDER) :




MODEL	GCF 150	GCF 200	GCF 250	GCF 300	GCF 400
Material Width (mm)	150	200	250	300	400
Material Thickness (mm)	0.35 - 1.00	0.35 - 1.00	0.35 - 1.00	0.35 - 1.00	0.35 - 1.00
Feeding Length (mm)	1.00 - 100	1.00 - 150	1.00 - 200	1.00 - 300	1.00 - 400
Feeding Angle	180°	180°	180°	180°	180°
Release Angle	135° - 195°	135° - 195°	135° - 195°	135° - 195°	135° - 195°

6. STRAIGHTENER :

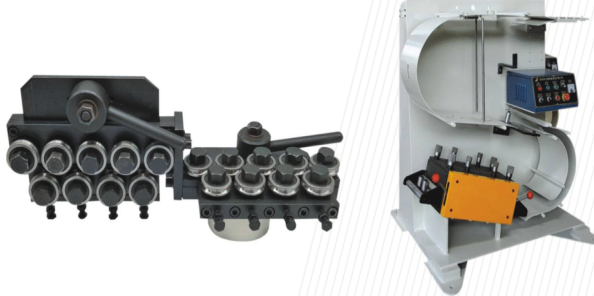


7 DECOILER/ RECOILER :

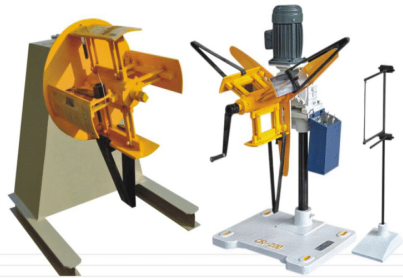

MODEL	Coil Width mm	Coil ID mm	Coil OD mm	Coil Weight Kgs.
MT - 300	300	380 - 530	800	300
MT - 400	400	380 - 530	1000	500
MT - 500	500	380 - 530	1200	1000
MT - 600	600	380 - 530	1500	1500
MT - 800	800	380 - 530	1900	2000

8. CNC PUNCH PRESS FEEDER :

SPECIFICATION	UNIT	SPECIFICATION PARAMETER	SPECIFICATION PARAMETER
Size	mm	1000 x 1500	2500 x 1250
Max Movement Speed	M / min	20	20
Max Thickness of Work Piece	mm	4.0	4.0
Precision	mm	0.2	0.2
Best Structure	—	Steel Welding	Steel Welding
Mold	set	1 to 6	1 to 6
Air Pressor	mpa	0.45	0.55




9. DECOILER CUM STRAIGHTENER 2 IN 1 AND DECOILER, STRAIGHTENER AND FEEDER 3 IN 1 :




10. OTHER ACCESSORIES :

Oil Lubricator Feeder



Progressive Molds



Industrial Robots



PARAS PRESS
TECH AUTOMATION

MANUFACTURERS OF :


Diesets Pillar Bush, Ball Cage Sleeve, Mould Bases & Die Spring
Pneumatic Air Feeder, Decoiler, Servo Feeder, Straightener

+91-98250 21972, +91-79-22821379

Nr. Unnati Estate, Sutar Karkhana, Naroda, N.H. No.-8,
Ahmedabad-382330. Gujarat. INDIA.

paraspresstechautomation@gmail.com
jitupatel69@rediffmail.com

www.paraspresstechautomation.com

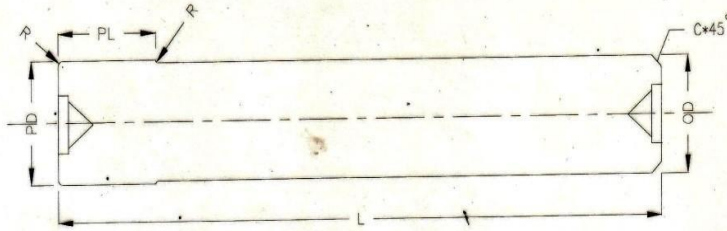

BUSH TYPE PILLER.

O.D.	P.D.	P.L.	C*45°	R	L
20 $+0.01$ -0.015	21 $+0.35$ -0.40	20	2	1	125/160
25 $+0.01$ -0.015	27 $+0.35$ -0.40	25	2	2	140/160/180/200
28 $+0.01$ -0.015	30 $+0.35$ -0.40	32	3	2	160/180/200/250
32 $+0.01$ -0.015	34 $+0.35$ -0.40	35	3	2	180/200/250/300
36 $+0.01$ -0.015	38 $+0.35$ -0.40	38	3	2	180/200/250/300
40 $+0.01$ -0.015	42 $+0.35$ -0.40	40	3	2	180/200/250/300

MAT. EN-31 (52100) BE.GRADE . HARD. 58° TO 62° R.C.

PARAS PRESS TECH AUTOMATION

FOR GRINDING.

NARODA,, AHMEDABAD.

PILLAR [BUSH TYPE]

PILLAR BUSH SIZE LIST

DIA	LENGTH							
20	160	180	200	225	250	300	350	400
25	160	180	200	225	250	300	350	400
28	160	180	200	225	250	300	350	400
32	160	180	200	225	250	300	350	400
36	*	180	200	225	250	300	350	400
40	*	180	200	225	250	300	350	400

PARAS PRESS TECH AUTOMATION



BEARING TYPE PILLER.

O.D.	P.D.	P.L.	C*45°	R	L
20+0.15 0.20	21 +0.35 0.40	20	2	1	125/160
25 +0.15 0.20	27 +0.35 0.40	25	2	2	140/160/180/200
28+0.15 0.20	30 +0.35 0.40	32	3	2	160/180/200/250
32+0.15 0.20	34 +0.35 0.40	35	3	2	180/200/250/300
36+0.15 0.20	38 +0.35 0.40	38	3	2	180/200/250/300
40+0.15 0.20	42 +0.35 0.40	40	3	2	180/200/250/300

MAT. EN-31 (52100) BE.GRADE HARD. 58° TO 62° R.C.

PARAS PRESS TECH AUTOMATION

NARODA,, AHMEDABAD.


PILLAR [BEARING TYPE]

FOR GRINDING.

PILLAR BUSH SIZE LIST

D I A .	LENGTH							
	160	180	200	225	250	300	350	400
20								
25								
28								
32								
36	*	180	200	225	250	300	350	400
40	*	180	200	225	250	300	350	400

PARAS PRESS TECH AUTOMATION

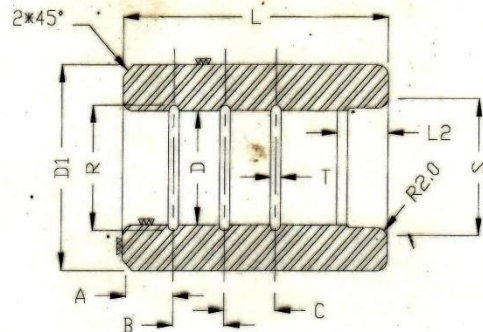

PLAIN BUSH FOR BUSH TYPE PILLAR.

D	D1	L	L2	S	R	T	A	B	C	C*45	R
20+0.005	36.030 .035	52	10	21	22	2	10	10	10	2*45	2
25+0.005	42.030 .035	65	25	26	27	2	10	10	10	2*45	2
28+0.005	50.030 .035	80	30	29	30	2	12	12	12	3*45	2
32+0.005	52.030 .035	80	30	33	34	2	12	12	12	3*45	2
36+0.005	58.030 .035	80	30	37	38	2	12	12	12	3*45	2
40+0.005	62.030 .035	80	30	41	42	2	12	12	12	3*45	2
40+0.005	62.030 .035	100	30	41	42	2	12	12	12	3*45	2

PARAS PRESS TECH AUTOMATION

FOR GRINDING.


NARODA,, AHMEDABAD.

BUSH - [BUSH TYPE]

BUSH SIZE LIST - BUSH TYPE

ID	OD	LENGTH	LENGTH
20	36	52	60
25	42	65	75
28	50	80	100
32	52	80	100
36	58	80	100
40	62	80	100/110/125

PARAS PRESS TECH AUTOMATION

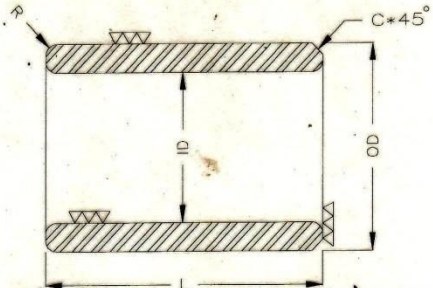

PLANE BUSH FOR BEARING TYPE PILLAR.

OD	ID	L	C*45	R	MATERIAL
36+0.03 0.035	26+0.02 0.025	52	2	2	EN-31-HARD. 58° TO 62° HRC.
42+0.03 0.035	31+0.02 0.025	65	2	2	
50+0.03 0.035	36+0.02 0.025	80	2	2	
52+0.03 0.035	40+0.02 0.025	80	3	2	
58+0.03 0.035	44+0.02 0.025	80	3	2	
62+0.03 0.035	48+0.02 0.025	80	3	2	

PARAS PRESS TECH AUTOMATION	FOR GRINDING.
NARODA,, AHMEDABAD.	
BUSH - [BEARING TYPE]	

BUSH SIZE LIST - BE.TYPE

ID	OD	LENGTH	LENGTH
26	36	52	60
31	42	65	75
36	50	80	100
40	52	80	100
44	58	80	100
48	62	80	100/110/125